

Features:

- polyethylene container with 480 litres capacity and up to 270 litres switching volume
- single-channel impeller pump with fibre cutting insert and large solids handling
- mechanical seal (up to 4kW) or chilled casting seal (> 5 kW) and shaft seal with intermediate oil chamber
- pump housing with flanged outlet bend DN 100
- lateral inlet with loose-type flange DN 150
- additional connection 1 1/2" for manual diaphragm pump
- air vent with loose-type flange DN 100 (Ø 110 mm)
- star-delta-start for 7,5 kW unit
- operation temperature max. 55°C
- operating mode S3 - 25%
- protection grade IP 57 - temporarily submersible


Application:

- drainage of sewage from apartment buildings or industrial enterprises etc.
- above-ground installation in frost-free rooms below the backflow level

Scope of delivery:

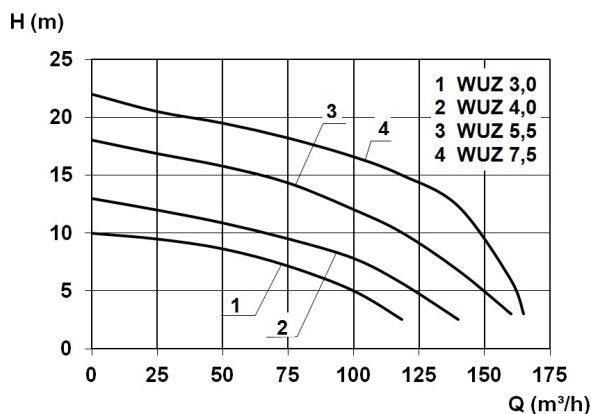
- pre-assembled lifting unit with 3,5 m connection cable to the motor and 3,5 m pneumatic tube to the control
- incl. ZPS1: comfortable, pneumatic level control with microcontroller, LCD plain text display for filling level, maintenance, operating hours, fault message and alarm signal in switchbox for indoor installation (7,5 kW ZPS1 control with star-delta-start)
- Attention! Non-return valve, gate valve and further junction fittings optional (see accessories) arately.

Product benefits:

- custom dimensions, custom inlets and on-site-assembly possible
- large container volume and switching volume (container volume up to 20.000 litres available)
- blockage-free operation by 80 mm solids handling
- comfort control unit included in delivery


Technical data:

Art.no.	U [V]	P ₁ [W]	P ₂ [W]	In [A]	n [min ⁻¹]	Q _{max} [m ³ /h]	H _{max} [m]	SH [mm]	PO	Weight [kg]
10549	400	8.700	7.500	16,9	1400	165,0	22,0	100	DN 100	240

Characteristics:

Materials:

Seal motor:	shaft seal
Seal pump:	mechanical seal

Example of installation:



Dimensions:

